




AS-6M18

MONOCRYSTALLINE MODULE

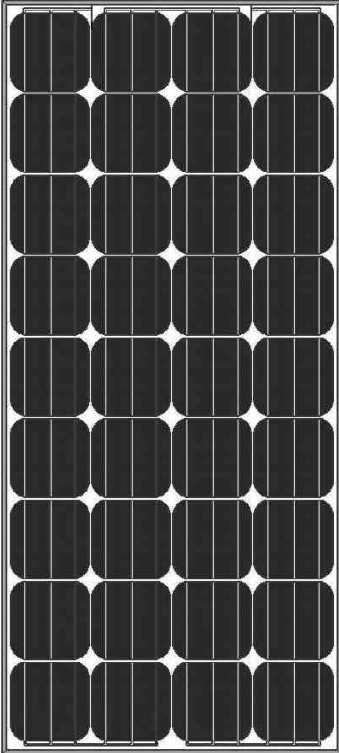

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 16.73% through advanced manufacturing technology.
- Low degradation and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Positive power tolerance of 0 ~ +3 %.
- High ammonia and salt mist resistance.
- Potential induced degradation (PID) resistance.


CERTIFICATIONS

- IEC61215, IEC61730, IEC62716, IEC61701, UL1703, CE, ETL(USA), JET(Japan), J-PEC(Japan), MCS(UK), CEC(Australia), FSEC(FL-USA), CSI Eligible(CA-USA), Israel Electric(Israel), Kemco(South Korea), InMetro(Brazil), TSE(Turkey)
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

SPECIAL WARRANTY

- 12 years limited product warranty.
- Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

**Passionately
committed to
delivering innovative
energy solution**

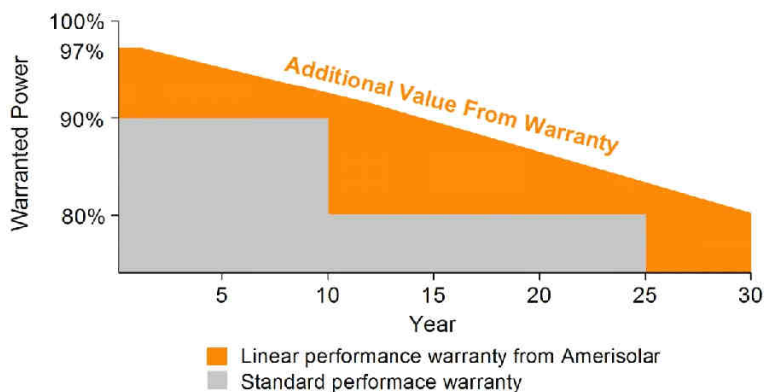

ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P_{max})	135W	140W	145W	150W	155W	160W	165W
Open Circuit Voltage (V_{OC})	21.8V	22.0V	22.2V	22.4V	22.6V	22.8V	23.0V
Short Circuit Current (I_{SC})	8.30A	8.45A	8.61A	8.75A	8.90A	9.05A	9.20A
Voltage at Nominal Power (V_{mp})	17.4V	17.6V	17.8V	18.0V	18.2V	18.4V	18.6V
Current at Nominal Power (I_{mp})	7.76A	7.95A	8.15A	8.33A	8.52A	8.70A	8.88A
Module Efficiency (%)	13.69	14.20	14.70	15.21	15.72	16.22	16.73
Operating Temperature	-40°C to +85°C						
Maximum System Voltage	1000V DC						
Fire Resistance Rating	Type 1(UL1703)/Class C(IEC61730)						
Maximum Series Fuse Rating	15A						

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P_{max})	100W	103W	107W	110W	114W	118W	121W
Open Circuit Voltage (V_{OC})	20.1V	20.2V	20.4V	20.6V	20.8V	21.0V	21.2V
Short Circuit Current (I_{SC})	6.72A	6.84A	6.97A	7.09A	7.21A	7.33A	7.45A
Voltage at Nominal Power (V_{mp})	15.8V	16.0V	16.2V	16.4V	16.6V	16.8V	17.0V
Current at Nominal Power (I_{mp})	6.33A	6.44A	6.61A	6.71A	6.87A	7.03A	7.12A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline 156x156mm (6x6inches)
Number of cells	36 (4x9)
Module dimensions	1483x665x35mm (58.39x26.18x1.38inches)
Weight	12kg (26.5lbs)
Front cover	3.2mm (0.13inches) low-iron tempered glass
Frame	Anodized aluminum alloy
Junction box	IP65, 2 diodes
Cable	4mm ² (0.006inches ²), 900mm (35.43inches)
Connector	MC4 or MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P_{max}	-0.43%/°C
Temperature Coefficients of V_{OC}	-0.33%/°C
Temperature Coefficients of I_{SC}	0.056%/°C


PACKAGING

Standard packaging	29pcs/pallet
Module quantity per 20' container	504 pcs
Module quantity per 40' container	1080 pcs


ENGINEERING DRAWINGS

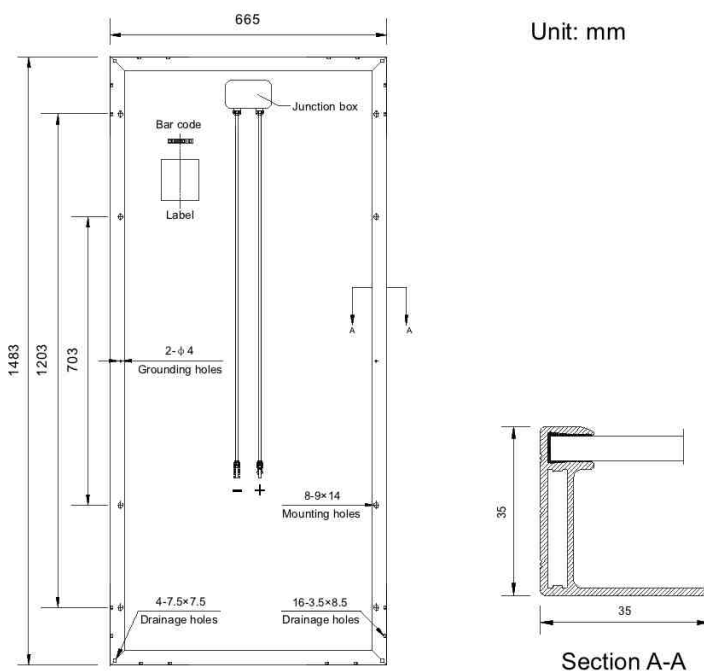

IV CURVES

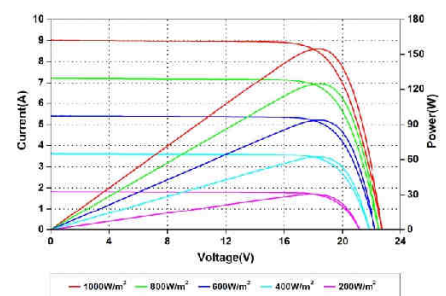

Current-Voltage and Power-Voltage Curves at Different Irradiances

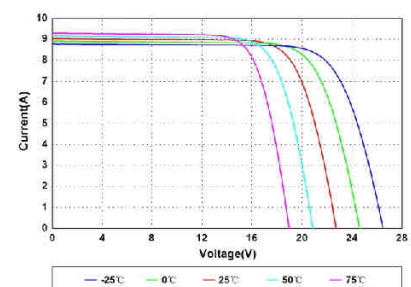

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.