




# AS-6M30-CET/AS-6M30-CEW

## DOUBLE GLASS MODULE

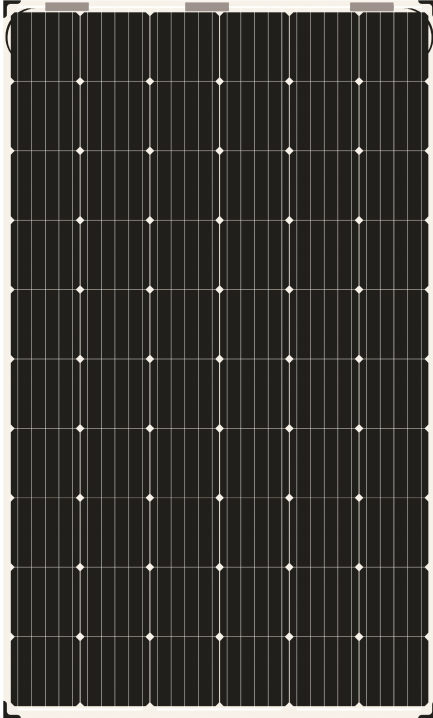

### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 19.15% by using high efficient solar cells and advanced manufacturing technology.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc.).
- Potential induced degradation (PID) free.
- Positive power tolerance of 0 ~ +3 %.


### CERTIFICATIONS

- IEC61215, IEC61730, CE
- ISO9001:2015: Quality management system
- ISO14001:2015: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system

### SPECIAL WARRANTY

- 12 years limited product warranty.
- Limited linear power warranty: 30 years 82.5% of the nominal power output.

Passionately  
committed to  
delivering innovative  
energy solution

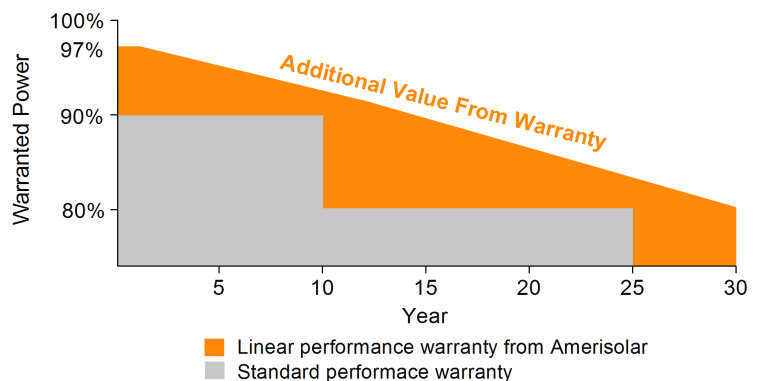

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	295W	300W	305W	310W	315W
Open Circuit Voltage ( $V_{oc}$ )	39.8V	40.0V	40.2V	40.4V	40.6V
Short Circuit Current ( $I_{sc}$ )	9.56A	9.64A	9.72A	9.80A	9.88A
Voltage at Maximum Power ( $V_{mp}$ )	32.7V	32.9V	33.1V	33.3V	33.5V
Current at Maximum Power ( $I_{mp}$ )	9.03A	9.12A	9.22A	9.31A	9.41A
Module Efficiency (%)	17.94	18.24	18.54	18.85	19.15
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1000V DC/1500 V DC				
Fire Resistance Rating	Class A (IEC61730)				
Maximum Series Fuse Rating	20A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	220W	224W	227W	231W	235W
Open Circuit Voltage ( $V_{oc}$ )	36.6V	36.8V	37.0V	37.2V	37.4V
Short Circuit Current ( $I_{sc}$ )	7.74A	7.81A	7.87A	7.94A	8.00A
Voltage at Maximum Power ( $V_{mp}$ )	29.8V	30.0V	30.2V	30.4V	30.6V
Current at Maximum Power ( $I_{mp}$ )	7.39A	7.47A	7.52A	7.60A	7.68A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline PERC 6inch
Number of cells	60 (6x10)
Module dimensions	1658x992x5mm (Junction box is not included)
Weight	19.6kg
Front Glass	2mm Tempered glass with AR coating
Back Glass	2mm Tempered glass/2mm Ceramic coated glass
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup>
Connector	MC4 or MC4 Equivalent

## TEMPERATURE CHARACTERISTICS


Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of $P_{max}$	-0.38%/°C
Temperature Coefficients of $V_{oc}$	-0.29%/°C
Temperature Coefficients of $I_{sc}$	0.048%/°C

## PACKAGING


Standard packaging	38pcs/pallet
Module quantity per 20' container	228Pcs
Module quantity per 40' container	988pcs

## ENGINEERING DRAWINGS


Unit: mm

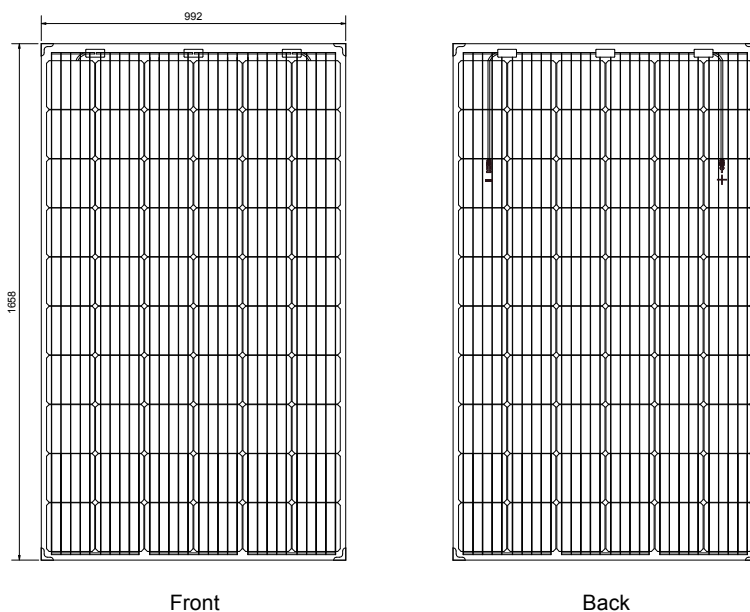

## IV CURVES

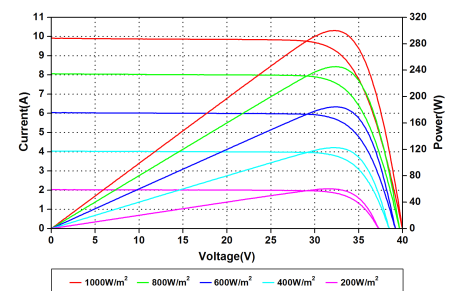

Current-Voltage and Power-Voltage Curves at Different Irradiances

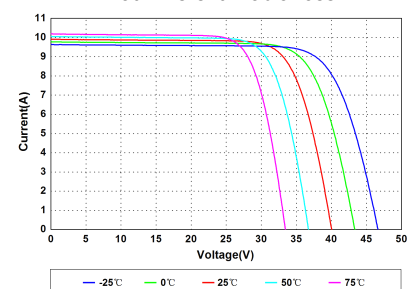

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.